

CE CQC ISO9001

Order No.:

CJUL4-12M-NA-F60℃
CJUL4-12M-NB-F60℃
CJUL4-12M-PA-F60℃
CJUL4-12M-PB-F60℃
CJUL4-12M-DA-F60℃
CJUL4-12M-DB-F60℃
CJUL4-12M-ADA-F60℃
CJUL4-12M-ADB-F60℃

Features

- Application-specific IC with reliable detection down to -60°C and high noise immunity.
- Using low-temperature silicone wire.
- The sensing surface is made of low-temperature resistant material, offering excellent environmental durability.

Wiring

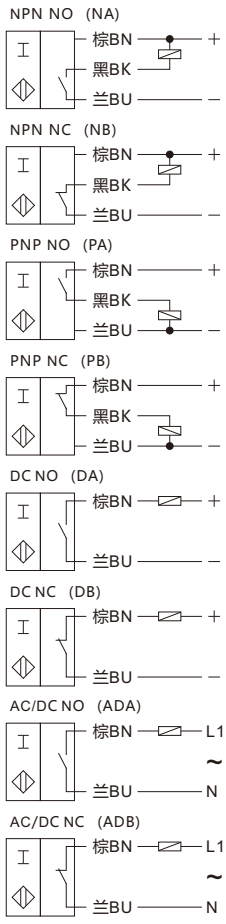

Accessory

Toothed nut*2

Overall dimension

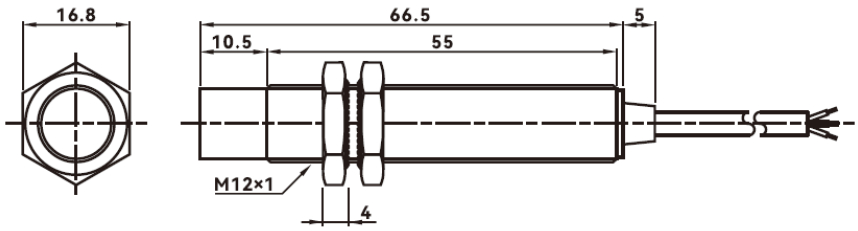

Technical Parameters

General description	
Switch point function	QSQ SQS G DG
Rated operating distance Vq	7 p p
Lqvwdoodwl r q	Q r q0Flush mounting
Standard detector	4 ; -4 ; -4W+T586D,
Reliable operating distance	3111615mm
Rated grade	
Rated voltage XE	NPN/PNP/D :DC:10...30V, AD:AC/DC:24-250V
Switching frequency f	NPN/PNP/D:0.8KHz , AD:40Hz
Hysteresis range	<15% of detection distance
Repeatability	<3% of detection distance
No load current Io	<12mA
Voltage drop Xg	NPN/PNP:<2V, D:<3V , AD:<6V
Working current	NPN/PNP:<200mA , D:<100mA , AD:<300mA
Leakage current	< 100uA
Circuit protection	Reverse polarity protection、Short-circuit protection、Surge absorption
Switching state indication	-
Surrounding environment	
Ambient temperature	-60℃...40℃ (No icing, no condensation)
Temperature effect	-Within -60℃... 40 ℃, within 20% of detection distance at+24 ℃
Ambient humidity	35...95%RH (no condensation)
Influence of voltage	<3%
Mechanical properties	
Wiring	2m standard cable
Shell material	Brass plated with pearl nickel
Sensing surface	PBT
Protection level	IP67
Withstand Voltage	500V AC, 50/60Hz 1 minute between the whole charging part and the shell.
Insulation resistance	≥20 MΩ (DC 500 V with a megohmmeter) between the whole charging part and the shell.
Vibration resistance	10～55 Hz, complex amplitude 1.5mm, 2H in X, Y and Z directions
Certification and Standards	
Product certification	CE CCC CQC ISO9001 ISO14001 ISO45001
Unit weight	About 70g

The datasheet is subject to change without notice.

Copyright Cheemi Tech

Cheemi Technology Co., Ltd China:0086(0)25--85560520 www.cheemi-tech.com E-mail:info@cheemi-tech.com