

## Order No.:

CJUA10-25Q-NA
CJUA10-25Q-NB
CJUA10-25Q-PA
CJUA10-25Q-PB
CJUA10-25Q-DA
CJUA10-25Q-DB

## Features

- Dedicated circuit, stable detection distance, strong anti-interference
- Use fold-resistant, oil-resistant cables.

## Wiring

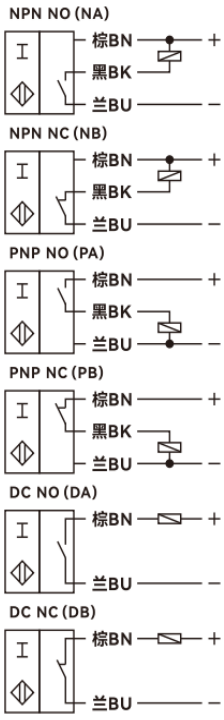


## Accessory

Screw*2sets

## Overall dimension

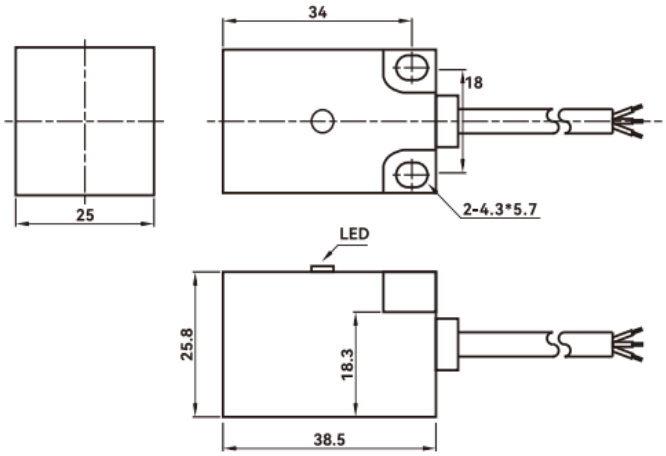


## Technical Parameters

| | |
|---|---|
| **General description** | |
| Switch point function | NPN, PNP, D |
| Rated operating distance Sn | 10mm |
| Installation | Non-flush mounting |
| Standard detector | 36*36*1t(Q253A) |
| Reliable operating distance Sa | 0...8mm |
| **Rated grade** | |
| Rated voltage UB | 10...30VDC |
| Switching frequency f | 0.3KHz |
| Hysteresis range | Within 15% of the detection distance |
| Repeatability | <3% of detection distance |
| No load current Io | <12mA |
| Leakage current Ir | 0...100uA |
| Voltage drop Ud | NPN/PNP:<2.0V, DC<3.0V NPN/ |
| Working current IL | PNP<200mA;DC<100mA |
| Circuit protection | Reverse polarity protection,Short-circuit protection, surge absorption |
| Switching state indication | Red LED indicator |
| **Surrounding environment** | |
| Ambient temperature | -25℃...70℃ (No icing, no condensation) |
| Temperature effect | -Within 25 ℃... 70 ℃, within 10% of detection distance at+24 ℃ |
| Ambient humidity | 35...95%RH no condensation |
| Influence of voltage | <3% |
| **Mechanical properties** | |
| Wiring | 2m standard cable |
| Shell material | PBT |
| Sensing surface | PBT |
| Protection level | IP67 |
| Withstand voltage | 500V AC, 50/60Hz 1 minute between the whole charging part and the shell |
| Insulation resistance | ≥20 MΩ (DC 500 V with a megohmmeter) between the whole charging part and the shell |
| Vibration resistance | 10～55 Hz, complex amplitude 1.5mm, 2H in X, Y and Z directions |
| **Certification and standards** | |
| Certificates | CE CCC CQC ISO9001 ISO14001 SO45001 |
| Unit weight | About 105g |

The datasheet is subject to change without notice. Copyright Cheemi Tech